



AUTOMATIC DOOR SYSTEMS HOTEL RFID LOCKS

Ozone Automatic Door systems are designed to meet the ease of entry, safety, & security requirements. The flexibility in design & installation allows the Automatic Door systems to be integrated in any type of architecture.

SLIM FRAME PROFILE FOR 111P-PLUS AUTOMATIC DOORS

OZOM-111-FRAMESYS-SD 3x1.5M SLV-AN ₹ 70,200
Framed System for Single Sliding Door


Also available in: **BM**

OZOM-111-FRAMESYS-DD 3x1.5M SLV-AN ₹ 1,49,500
Framed System for Double Sliding Door



Features:

- Sleek and slim design, which provides a modern and elegant appearance.
- With narrow profiles and large glass surfaces, it allows for maximum transparency and natural light.
- The profile is designed to provide excellent thermal insulation
- Suitable for various applications, including office buildings, retail stores, hospitals, and public facilities
- Support 10mm Glass thickness.

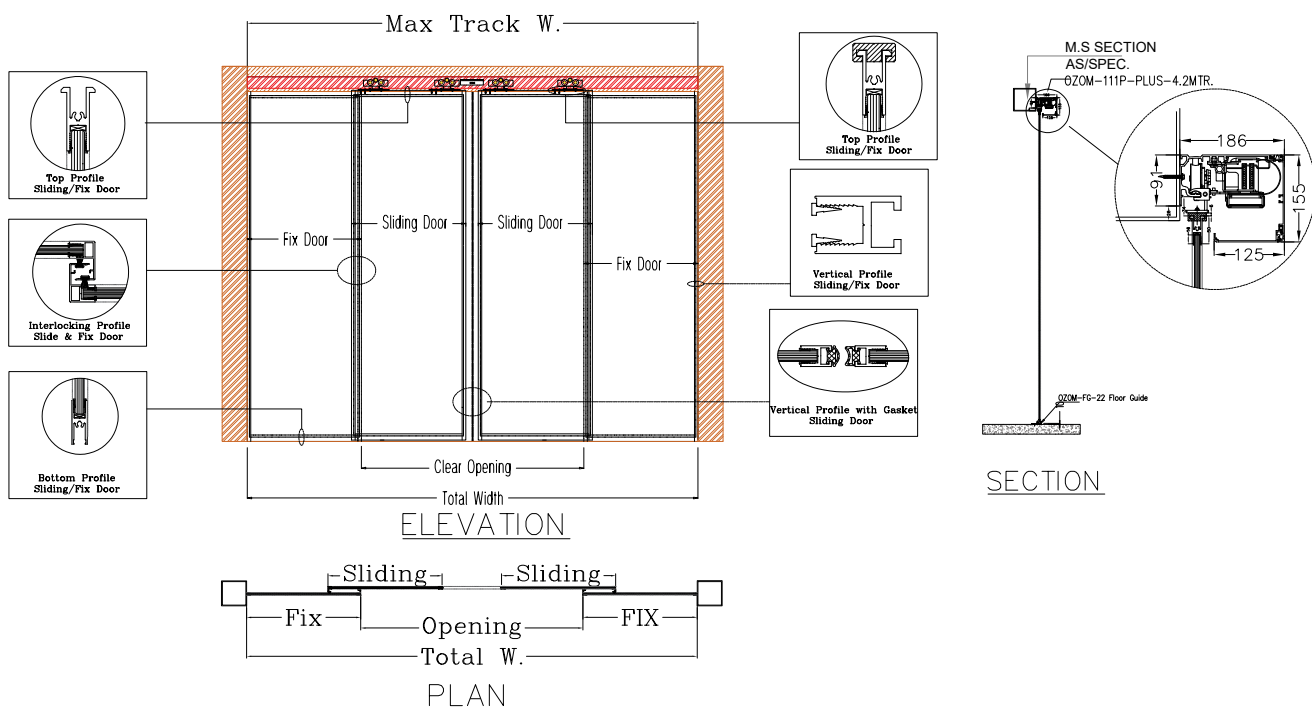

PREMIUM PLUS AUTO SLIDING DOOR SYSTEM (HIGH TRAFFIC AREA, HEAVY DUTY DOOR)

OZOM-111P-PLUS 4.2M SLV-AN	₹ 1,87,000
OZOM-111P-PLUS 4.2M STD BM	₹ 2,05,700
OZOM-111P-PLUS 5.2M SLV-AN	₹ 2,07,900
OZOM-111P-PLUS 5.2M STD BM	₹ 2,39,000
OZOM-111P-PLUS 6M SLV-AN	₹ 2,23,200
OZOM-111P-PLUS 6M STD BM	₹ 2,61,700

S Series
Premium Collection of
Architectural Hardware

Also available in:


BM	SLV AN
PHANTOM GREY	TAN BRASS

Compact & Slim body | Noiseless Functionality | Intelligent Controller | Modular Design



Track length option:

- 4.2mtr/5.2mtr/6mtr

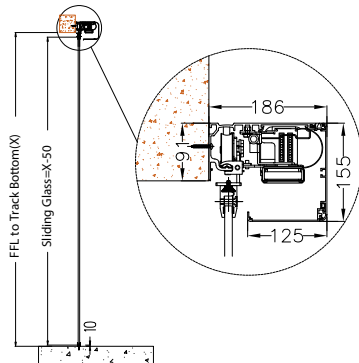


Features:

- DC Brushless Motor quiet, durable, and low-maintenance.
- Anti-Jump Mechanism prevents the door from derailing during movement.
- Intelligent microprocessor-based self-learning controller
- Opening and closing speed, hold-open time, and sensitivity are all adjustable.
- Built for continuous operation with minimal upkeep, ensuring reliability in busy locations.
- Easily integrates with a wide range of access and safety devices including Microwave sensor, Hand Wave, Wireless Push Buttons, Safety Beams, Face recognition device, Finger print access control and more.
- Tested in-house for 1,000,000 operating cycles to ensure reliability.

Specifications:

- Single panel door weight: 1x120 kg
- Double panel door weight: 2x120 kg
- Track size (HxW): 92mmx186mm
- Track cover height: 155mm
- Motor: 24V DC, Brushless motor
- Manually opening and closing force: <45N.
- Supply Voltage: AC220-230V

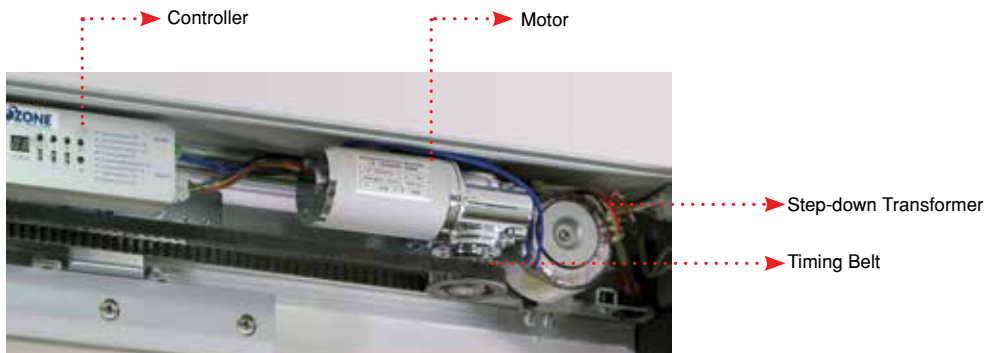

Scan QR for
Installation Video

Note: Warranty will be void if CVT is not installed.

EASY PLUS AUTO SLIDING DOOR SYSTEM (AUTOMATIC SENSOR DOOR FOR LOW TRAFFIC AREA)

E Series

OZOM-111E-PLUS-N 4.2M AN	₹ 1,26,700
OZOM-111E-PLUS-N 4.2M BM	₹ 1,39,400
OZOM-111E-PLUS-N SINGLE 2.4M AN	₹ 72,400
OZOM-111E-PLUS-N SINGLE 2.4M BM	₹ 79,700

Also available in:

BM

PHANTOM
GREY

TAN
BRASS

Compact & Slim body | Intelligent Controller | Modular Design | Noiseless Functionality



Automatic Doors

Features

- Microprocessor control system manages door operation intelligently and efficiently.
- Self-learning function automatically detects door width and travel limits during setup.
- Opening & closing speed adjustment allows custom speed settings for safe and efficient door movement.
- Brushless DC motor, long working life and low noise.
- Four different functions with remote control keypad: Always open, half open, exit only, lock.
- Works with a wide range of access and safety devices sensors, push buttons, wave sensor, safety beams, Face sensors and biometric systems for enhanced versatility.


Specifications:

- Single panel door weight: 1x100 kg
- Double panel door weight: 2x100 kg
- Track size (HxW): 128mmx110mm
- Track cover height: 180mm
- Motor: 24V DC, Brushless motor
- Manually opening and closing force: <40N.
- Supply Voltage: AC220-230V

Note: Warranty will be void if CVT is not installed.

Track length option:

- 4.2mtr/2.4mtr



AIRDRIVE - THE WORLD'S SLIMMEST AUTOMATIC SLIDING DOOR SYSTEM

S Series
Premium Collection of
Architectural Hardware

OZOM-AD68N 5.9M SS ₹ 3,87,500

Also available in: **BM**




Features:

- Ultra-slim design with a compact height of just 68 mm, making it one of the slimmest automatic sliding door systems available.
- Track Profile equipped with an anti-noise rubber profile for smooth and quiet operation.
- A seamless blend of elegance, strength, and smooth performance, ideal for modern architectural demands.
- Equipped with fully protected system input ports, minimizing the risk of damage during installation due to human error.
- Complies with international standards including DIN18650, EN16005, EN60335.
- A top-tier solution for architects and professionals seeking refined aesthetics and sophisticated automation solutions.

Specifications:

- Track/engine case: 68x135mm (ht x depth)
- Track length: 4.5 & 5.9mtr
- Single leaf door weight: 1x150kg
- Double leaf door weight: 2x120kg
- Maximum door opening width: 2000mm for single panel & 3000mm for double panel
- Motor: compliant with EU low voltage directives with maximum power consumption of 250W
- Opening speed: adjustable 100-550mm/sec
- Closing speed: adjustable 100-500mm/sec


Slimmest track of 68mm cover height

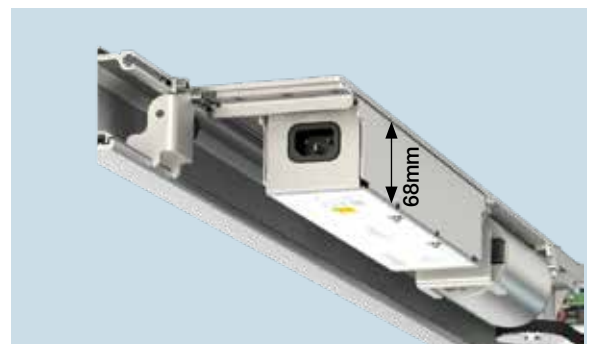

Note: Warranty will be lapsed in absence of CVT.

PANIC BREAKOUT - AUTOMATIC SLIDING DOOR SYSTEM

OZOM-PB-G STD ₹ 15,47,200

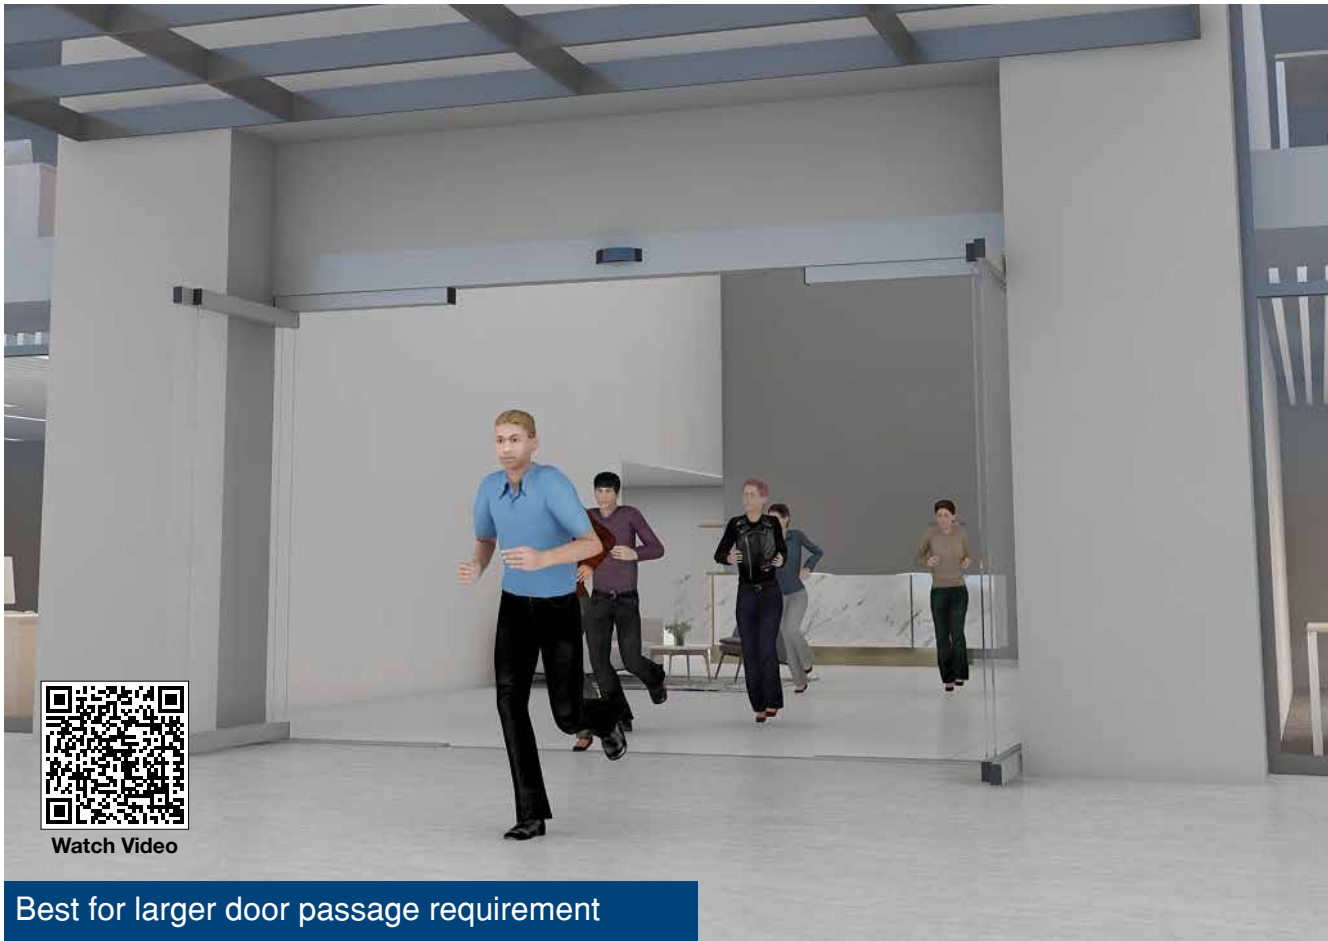

Automatic Doors

Best for larger door passage requirement



Get wider door opening with panic breakout feature



Panic breakout feature facilitates quick evacuation

Specifications:

Single leaf Door Weight	100 Kg
Double leaf Door Weight	100x2 Kg
Power consumption	200W
Ambient temperature	-30°~+50° C
Motor	Dunkermotoren from Germany
PSA control Panel	37 parameters could be set
Track and Cover	High strength, 5mm thickness

Features:

- Panic breakout allows door panels to swing open manually during emergencies.
- Highly suitable for any type of heavy transit access when sudden evacuation may be required.
- Smooth, hands-free sliding via motion sensors for regular use.
- Brushless DC motor ensures energy-efficient and reliable performance.
- Adjustable settings for speed, force, and hold-open time.
- Supports Microwave sensor, Hand wave sensor, wireless touch button, Face sensor, biometric access.

Applications:

- Airports, Shopping Malls, Car Showrooms, and Warehouses

Note: Warranty will be void if CVT is not installed

TELESCOPIC AUTOMATIC SLIDING DOOR SYSTEM

Ozone Telescopic Automatic Door System is designed to work on double pulley mechanism that enables wider door opening with less parking space. With our Telescopic Automatic Door System, you can achieve upto 3mtr wide door opening making it best suitable for automobile showrooms and areas of high traffic movement.



OZOM-11-T 4.2M STD ₹ 3,47,300
OZOM-11-T 5M STD ₹ 3,69,200

Telescopic Automatic Sliding Door System with one on one panel

TECHNICAL PARAMETER	OZOM – 11T
Power	AC 220V (50-60 Hz), AC 110v (option)
Controller	Micro-Processing
Motor	DC 24V 60W/90W
Door weight maximum	90kg x 2/125kg x 2
Door width	Minimum 550mm
Opening time	0-10 sec.(Adjustable)
Power Transfer	UPS, Program Switch

Features:

- Telescopic mechanism allows wider clear openings by sliding multiple panels over each other.
- Provides up to 30–40% more opening width compared to standard sliding doors.
- Equipped with a durable brushless DC motor for long service life.
- Compatible with access control systems like Face recognition, RFID card and biometrics.
- Adjustable parameters for speed, hold-open time, and sensor sensitivity.

Note: Warranty will be void if CVT is not installed

SEMI AUTOMATIC SLIDING DOOR SYSTEM

OZOM-SA-111-N STD SSS ₹ 52,300

The Semi Automatic Doors System is a sliding door which is opened manually but closes automatically on its own with the help of an air cylinder mechanism. It does not require any electrical connection. Another important feature of this door is that it closes softly on the last end making the process smooth and silent. The closing speed can be adjusted as per the traffic movement and opening size. The Maximum door width possible for this system is 1000mm (track length 2100mm) and the Maximum door weight is 80kg. The door can be integrated with standard locks. An ideal application for these doors is rest room entrances, conference rooms, etc. The system can be used for frameless glass doors as well as framed/wooden doors.



Semi-Automatic Door Technical Parameters

TECHNICAL PARAMETERS	OZ-OM-SA-111
Single leaf Maximum opening width	1000mm
Maximum door weight	80Kg
Maximum door height	2100mm
Door Type	Framed & Frameless doors
Door parking when open	Possible
Glass cut-out	Not required

Features:

- Suitable for Frameless glass doors, wooden doors, & framed doors
- Door open manually and closes automatically
- Come with in-built air cylinder mechanism
- No electrical connection required
- Soft & Silent door closing
- Closing Speed can be adjusted

Application:

- Rest room entrances, office cabins, conference rooms, and meeting rooms.

REVOLVING DOOR SYSTEMS



Watch Video

A building entrance should ensure smooth & secure traffic passage and at the same time add aesthetic value. Hence, a door system should be chosen which meets functional as well as aesthetic requirement of the space. Ozone Revolving Doors are just the right fit for such building entrances. They offer varied security & functionality benefits along with outstanding user experience and impart a spectacular look to the entrance.

*OZONE Revolving Door Systems:


- Available with 3 or 4 leaf configuration
- Automatic and manual options
- Suitable for main entrances of commercial establishments
- Ensure safe & smooth Traffic flow
- Anti-collision & Anti-squeeze Function
- Custom solutions available



Emergency Stop Button



Slow Turning Feature for Specially Aabled People




4 Leaf Revolving Door



3 Mode Selection Lock Key



Side & Bottom Brushes to Prevent AC Loss



3 Leaf Revolving Door



Radar Detectors

*Available on Specific Demand

REVOLVING DOOR SYSTEMS

*Manual Revolving Door Technical Parameters

DOOR PARAMETERS	MANUAL REVOLVING DOOR
Type of drive unit	Manual
Roof outside color	Anodized
Roof outside	Water proof with 2 side drainages
Diameter	1800-3600mm
Total height	2500mm
No. of door leafs	3/4 leaf
Optional accessories (Additionally Charged)	Speed control system & panic breakout available

*Automatic Revolving Door Technical Parameters


DOOR PARAMETERS	AUTOMATIC REVOLVING DOOR
Type of drive unit	Automatic
Roof outside color	Anodized
Roof outside	Water proof with 2 side drainages
Diameter	1800-3600mm
Total height	2500mm
No. of door leafs	3/4 leaf
Door locking	Key locking with drop bolt
Lighting	3x12V decoration light
Accessories	Emergency stop button, drive unit, button programme switch & handicap switch (2 sets)
Sensor	Radar sensor
Safety Sensor	Leading mullion sensor (safety sensor for inside and outside entrance
Power supply	220V/AC 10% 50 Hz
High speed adjustment range	1-4 RPM
Low speed adjustment range	0.5 - 1.5 RPM
Motor Power	250W
Lighting power	300W
Control system power	50W

*Technical specification will vary as per project requirement.

MICROWAVE MOTION SENSOR FOR AUTOMATIC DOORS

OZOM-AC-99N STD BLACK ₹ 10,200

Microwave motion sensor designed for precise, contactless activation of automatic doors, ensuring smooth and efficient entry.

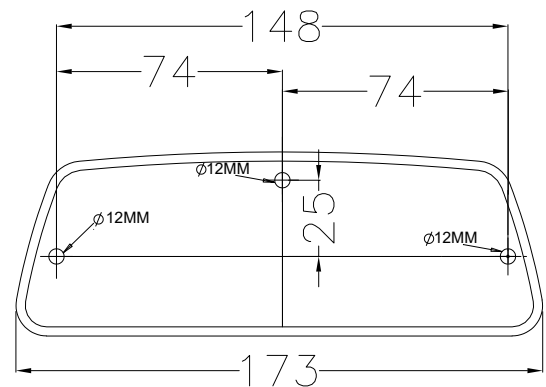

AC-99N Line Drawing



Technical Specification

Technology	Radar 24.125 GHz
Mounting Height	1.8 - 3m
Operating Voltage	12-36 VDC / 12-28 VAC
Operating Current	max 32 mA at 24 VDC
Power Consumption	max.1.3 W
Output Radar	max. switching voltage: 48 VAC/VDC max. switching current: 120 mA max. switching current: 550 mV
Protection Type	Suitable for use acc. to IP54
Operating Temperature	-20°to 60°C
Dimensions	172x60x48mm(LXWxD)
Output	relay (free of potential change-over contact)
• Maximum contact voltage	42V AC-60V DC
• Maximum contact current	1A (resistive)
• Maximum switching power	30W (DC)/60VA (AC)
Weight	120g
Cable Length	3m

MICROWAVE MOTION AND SAFETY SENSOR FOR AUTOMATIC DOORS

OZOM-AC-11-ZS-N STD ₹ 19,500

Integrated motion and safety sensor (Combo) delivering seamless door activation with superior obstacle detection.

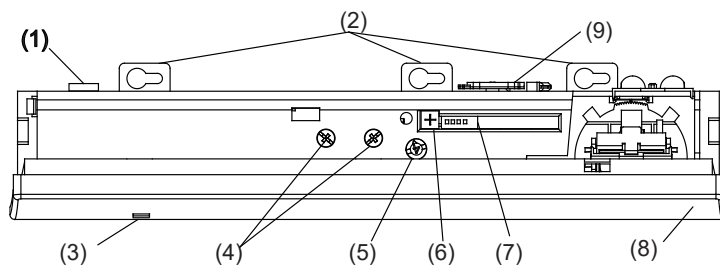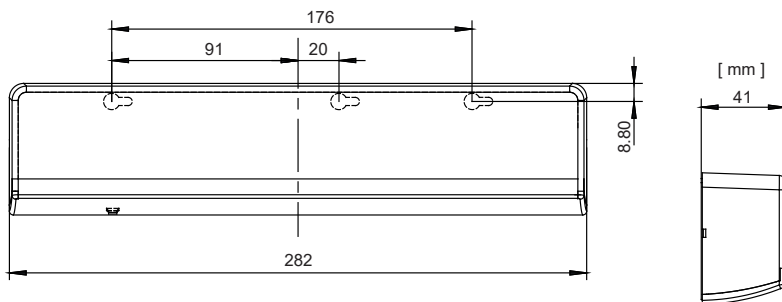

1. Cover
2. Mounting holes
3. Operation indicator
4. Width adjustment screw
5. Depth angle adjustment screw
6. Microwave sensitivity screw
7. Dip switches
8. Detection window
9. Adjustment tool

TECHNICAL SPECIFICATION

Cover color	Black
Mounting height	2m-3.5m
IP rate	IP54
Signal output	NO/NC
Quiescent current	70mA(12V)
Working current	78mA(12V)
Weight	230g
Operation temperature	-20°C — +55°C
Power supply	AC/DC 12-24V
Learning time	15s

Infrared sensor	
Infrared type	850mm
Depth angle	-6 — +6
Output hold time	1Sec
Response time	< 0.3Sec

Microwave sensor	
Microwave type	24.125GHz
Depth angle	25 — 45
Output hold time	1Sec

DOME TYPE SENSOR



Features:

- Face recognition sensor for automatic doors
- Stores 500 individual facial profiles
- Low light detection.
- Adjustable camera angle upto 50°
- Installation height is 3Mtr max
- LED indicators for status display
- Passage mode for all face access when needed

Remote Control Functionality-

A 4-key remote allows for easy operation:
Key A: Opens the door
Key B: Switches working modes
Key C: Adds face data
Key D: Deletes face data



Face
Recognition



OZOM-FRS-01 STD BLACK ₹ 33,900



Swing Door



Sliding Door

FACE RECOGNITION SENSOR FOR AUTOMATIC DOORS



Features:

- 4.3 inch smart fingerprint control screen
- Equipped with binocular HD live camera
- Touch menu management
- Multiple access modes
- Material: ABS + Acrylic Panel
- Identification distance: 0.3m - 1.5m
- 5000 capacity for Face, Fingerprint, Card, and Password Access



Fingerprint




Password



RFID Card



Face
Recognition

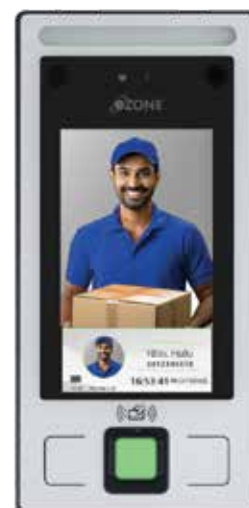

OZOM-DFR-11 STD ₹ 44,100

AUTO DOOR ACCESSORIES



OZOM-SW-11 STD ₹ 450
Push Button (Exit Switch) for Automatic Doors



OZOM-SW-11M STD ₹ 1,700
Metallic wall mounting push button switch



OZOM-HWS-11 STD ₹ 13,900
Hand Wave Sensor



OZOM-FPC-11M STD ₹ 21,700
Finger Print Access Control



OZOM-WPB-22 STD ₹ 17,800
Wire less Touch/Push Button



OZOM-AC-22-FS STD ₹ 14,900
Foot Sensor Switch
Activates the door to open when the switch senses the foot.



OZOM-ACC-DSW-33 STD ₹ 22,200
Non-Contact or Disabled Switch



OZOM-111P-PLUS-ACC-EML STD ₹ 12,500
Electro Magnetic Lock for 111P



OZOM-111E-PLUSN-ACC-EML STD ₹ 11,200
Electro Magnetic Lock for 111E-Plus-N



1mtr ₹ 5,900
1.5mtr ₹ 8,500

OZOM-PR-11 1M ZINC
OZOM-PR-11 1.5M ZINC
Aluminium clamp
Available in 1mtr. & 1.5mtr (pcs)



₹ 1,400

OZOM-FG-22 STD SS
Floor guides for framed doors with adjustable width (pcs)



SB-11N ₹ 12,000
SB-12 ₹ 18,700

OZOM-SB-11N STD SS
Safety Barrier



₹ 900

OZOM-FG-11 STD SS
Floor guides for frameless glass doors (pcs)



₹ 7,010

OZOM-11P-AC-11 STD
Remote Control for Automatic Sliding Door



₹ 4,600

OZOM-111P-PLUS REMOTE
Remote Control for 111P Door



₹ 4,600

OZOM-111E-PLUS-N REMOTE
Remote Control for 111E-Plus-N Door



₹ 6,800

OZOM-111P-PLUS-ACC-MFS STD
Multi-Function Switch



₹ 53,900

OZOM-SB-L750 STD
Laser Safety Beam for Auto Swing Door

AUTOMATIC SWING DOOR SYSTEMS

SINGLE ACTION OVERHEAD DOOR OPERATOR

For Wooden and Framed door



OZOM-SD-200 STD AN ₹ 1,13,700

Automatic overhead door operator



200Kg



Weight Carrying
Capacity

Features:

- Hands-free operation using sensors, push buttons, or access systems for hygiene and convenience
- Adjustable opening and closing speed
- Manual opening and closing option available during power failure
- Quiet and smooth operation through advanced motor
- Compatible with access control systems such as RFID, Face recognition and fingerprint
- Remote control operation possible through wireless remote
- Can be retrofitted onto existing manual swing doors
- Suitable for framed and wooden swing door



Watch Video

Note: Warranty will be void if CVT is not installed

AUTOMATIC SWING DOOR SYSTEMS

DOUBLE ACTION CONCEALED DOOR OPERATORS



OZOM-CSD-T STD SS ₹ 1,44,100
Top mounted concealed door operator

- Maximum Door Width (Wooden and Framed Door): 1500mm
- Maximum Door Width (Frameless Glass Door): 1200mm
- Suitable for Wooden, Framed and Frameless Glass Door
- Extra hardware for Glass door: E-Series Patch Fittings



OZOM-CSD-B STD SS ₹ 1,44,100
Bottom mounted concealed door operator

- Maximum Door Width (Wooden and Framed Door): 1500mm
- Maximum Door Width (Frameless Glass Door): 1200mm
- Suitable for Wooden, Framed and Frameless Glass Door
- Extra hardware for Glass door: E-Series Patch Fittings



Applications:

- Hospitals
- Hotels
- Passage/Lobby
- Specially-abled Toilets
- Retail Outlets
- Offices/Residential apartments/
- Public Buildings
- Airports

Operator can be integrated with:

- Microwave sensor
- Foot switch sensor
- Hand wave sensor
- Electromagnetic locking machine
- RFID/Numeric/Fingerprint access control system
- Push Button

Note: Warranty will be void if CVT is not installed

AUTOMATIC SWING DOOR OPERATORS TECHNICAL DATA TABLE

TECHNICAL PARAMETERS	OZOM-SD-200 STD AN	OZOM-CSD-T STD SS	OZOM-CSD-B STD SS
Maximum Door Width	600-1200mm	1500mm	1500mm
Maximum Door Weight	200kg	150KG	150KG
Opening Direction	Single action	Double Action	Double Action
Accessories Included	Controller, machine and remote	Controller, machine and remote	Controller, machine and remote
Installation Type	Top Installation	Top Installation	Floor Installation
Maximum Motor Power	65W/100W	65W/100W	65W/100W
Motor	DC 24V 55W/100W Brushless Motor	DC 24V 55W/100W Brushless Motor	DC 24V 55W/100W Brushless Motor
Closing Speed	10~43cm/s	3~14cm/s	3~14cm/s
Open Door Hold Time	0.5~10s	0.5~10s (adjustable)	0.5~10s (adjustable)
Open Range	70° ~ 115°	± 90°	± 90°
Supply Voltage	AC110V/AC220V 50Hz~ 60Hz	AC110V/AC220V 50Hz~ 60Hz	AC110V/AC220V 50Hz~ 60Hz
Use Temperture	-30° C ~ +50° C	-30° C ~ +50° C	-30° C ~ +50° C
Use Humidity	Less than 85%	35 ~ 85%RH (non-condensing)	35 ~ 85%RH (non-condensing)
Protection Level	IP64	IP64	IP44
Extended Function	Safety light eyes, such as remote control of various types of access control	Safety light eyes, such as remote control of various types of access control	Safety light eyes, such as remote control of various types of access control
Watt Power	14W	14W	14W
Fuse	Minimum 3.5A Slow	Minimum 2.5A	Minimum 2.5A
Maximum Current	1A	1A	1A
Dimensions	544x72x106 mm	288x86x72 mm	340x82x166 mm
Single/Double Door use	One set for single door, 2 set for double with common accessories	One set for single door, 2 set for double with common accessories	One set for single door, 2 set for double with common accessories
Product Image			

PREMIUM HOTEL RFID CARD LOCKS



OZHL-RF-V15-14L STD SS ₹ 17,400
OZHL-RF-V15-14R STD SS ₹ 17,400
 IDS & Opera Software Based Hotel Lock



OZHL-RF-V15-15L STD BM ₹ 18,400
OZHL-RF-V15-15R STD BM ₹ 18,400
 IDS & Opera Software Based Hotel Lock

ACCESSORIES FOR V-15 LOCKS



₹ 45,900
OZHL-RF-V15-ACC-HANDHELD-N BLACK
 Handheld Device



₹ 4,600
OZHL-RF-V15-ACC-PS-N STD BLACK
 Power Saver (Key Tag)



₹ 26,400
OZHL-RF-V15-ACC-CR-N STD BLACK
 Card Reader



₹ 27,150
OZOM-RF-HLS
 Hotel Lock Software



₹ 190
OZHL-RF-V15-ACC-CARD-N STD BLACK
 RFID Card



₹ 1,41,400
OZHL-RF-V15-ACC-EAC-N
 Elevator Access Control System

*Available on request

HOTEL RFID CARD LOCKS

New



OZHL-RF-V9-11L STD BM ₹ 12,100

OZHL-RF-V9-11R STD BM ₹ 12,100

Software Based Hotel Door Lock

ACCESSORIES FOR V-9-11R/L LOCKS



₹ 4,450

OZEL-RF-V9-ACC-PS-N WHITE STD
Power Saver



₹ 4,450

OZEL-RF-V9-ACC-PS-N STD BM
Power Saver



₹ 23,800

OZEL-RF-V9-ACC-DC-N STD WHITE
Data Collector



₹ 27,150

OZOM-RF-HLS
Hotel Lock Management S/W



₹ 20,100

OZEL-RF-V9-ACC-CR-N STD BLACK
Card Reader



₹ 200

OZEL-RF-V9-ACC-CARD-N STD WHITE
RFID Card

Also available in Black color.



₹ 1,10,310

OZEL-RF-V9-ACC-EAC-N STD
Elevator Access Control System
for V9 Locks

HOTEL RFID CARD LOCKS



OZHL-RF-V9-12R STD BM ₹ 10,800
OZHL-RF-V9-12L STD BM ₹ 10,800
 Software Based Hotel Door Lock

ACCESSORIES FOR V-9-12R/L & V-9-13R/L LOCKS



₹ 4,450

OZEL-RF-V9-ACC-PS-N WHITE STD
 Power Saver



₹ 4,450

OZEL-RF-V9-ACC-PS-N STD BM
 Power Saver



₹ 23,800

OZEL-RF-V9-ACC-DC-N STD WHITE
 Data Collector



₹ 27,150

OZOM-RF-HLS
 Hotel Lock Management S/W



₹ 20,100

**OZEL-RF-V9-ACC-CR-N
 STD BLACK**
 Card Reader



₹ 200

**OZEL-RF-V9-ACC-CARD-N
 STD WHITE**
 RFID Card

Also available in Black color.



₹ 1,10,310

OZEL-RF-V9-ACC-EAC-N STD
 Elevator Access Control System
 for V9 Locks

HOTEL RFID CARD LOCKS

New



OZHL-RF-V9-13L STD BM ₹ 10,300
OZHL-RF-V9-13R STD BM ₹ 10,300
 Software Based Hotel Door Lock

ACCESSORIES FOR V-9-13R/L LOCKS



₹ 4,450

OZEL-RF-V9-ACC-PS-N WHITE STD
 Power Saver



₹ 4,450

OZEL-RF-V9-ACC-PS-N STD BM
 Power Saver



₹ 23,800

OZEL-RF-V9-ACC-DC-N STD WHITE
 Data Collector



₹ 27,150

OZOM-RF-HLS
 Hotel Lock Management S/W



₹ 20,100

**OZEL-RF-V9-ACC-CR-N
 STD BLACK**
 Card Reader



₹ 200

**OZEL-RF-V9-ACC-CARD-N
 STD WHITE**
 RFID Card

Also available in Black color.



₹ 1,10,310

OZEL-RF-V9-ACC-EAC-N STD
 Elevator Access Control System
 for V9 Locks

HOTEL RFID CARD LOCKS



L Std.	₹ 9,700
R Std.	₹ 9,700

OZEL-RF-V9-666L-N STD SILVER
OZEL-RF-V9-666R-N STD SILVER
 Software Based Hotel Door Lock
 Also Available in Gold Finish



L Std.	₹ 11,200
R Std.	₹ 11,200

OZEL-RF-V9-666L-N STD GOLD
OZEL-RF-V9-666R-N STD GOLD



L Std.	₹ 8,150
R Std.	₹ 8,150

OZEL-RF-V9-777L-N STD SILVER
OZEL-RF-V9-777R-N STD SILVER
 Software Based Hotel Door Lock
 Also Available in Gold Finish



L Std.	₹ 9,400
R Std.	₹ 9,400

OZEL-RF-V9-777L-N STD GOLD
OZEL-RF-V9-777R-N STD GOLD

ACCESSORIES FOR V9-666 & V9-777 L/R STD LOCKS



₹ 4,450

OZEL-RF-V9-ACC-PS-N WHITE STD
 Power Saver



₹ 4,450

OZEL-RF-V9-ACC-PS-N STD BM
 Power Saver



₹ 23,800

OZEL-RF-V9-ACC-DC-N STD WHITE
 Data Collector



₹ 27,150

OZOM-RF-HLS
 Hotel Lock Management S/W



₹ 20,100

OZEL-RF-V9-ACC-CR-N
STD BLACK
 Card Reader



₹ 200

OZEL-RF-V9-ACC-CARD-N
STD WHITE
 RFID Card

Also available in Black color.



₹ 1,10,310

OZEL-RF-V9-ACC-EAC-N STD
 Elevator Access Control System
 for V9 Locks

HOTEL RFID CARD LOCKS



OZEL-RF-V11-444 L STD PSS ₹ 17,100
OZEL-RF-V11-444 R STD PSS ₹ 17,100
 Software Based Hotel Door Lock



OZEL-RF-V11-555 L STD SSS ₹ 12,500
OZEL-RF-V11-555 R STD SSS ₹ 12,500
 Software Based Hotel Door Lock

ACCESSORIES FOR V-11 LOCKS



₹ 190

OZEL-RF-V11-ACC-CARD STD
 RFID Card



₹ 2,650

OZEL-RF-V11-ACC-QC STD
 Query Card



₹ 4,450

OZEL-RF-V11-ACC-PS WHITE STD
 Power Saver (30 AMP)



₹ 27,150

OZOM-RF-HLS
 Hotel Lock Management S/W



₹ 22,000

OZEL-RF-V11-ACC-CR BLACK STD
 Card Reader



₹ 1,40,100

OZEL-RF-V11-ELC BLACK
 Elevator Access Control System

*Available on request

DIGITAL GLASS DOOR LOCKS



Specifications:

- Suitable for Glass door thickness of **10mm~12mm**
- Material- Zinc Alloy & ABS

Features:

- 5 ways access: Mobile App, Fingerprint, RFID Card, User Pin Code, Unlock Through Remote
- Automatic Locking System
- Passage (open) Mode

Applications:

- Residential Apartments, Libraries, Offices, Hospitals



OZ-FGL-LIFE G2G BLACK ₹ 28,080
Glass-to-Glass Doors

OZ-FGL-LIFE G2W BLACK ₹ 27,520
Glass-to-Wall Doors



Access Options:



Fingerprint



RFID Card



User Pin Code



Mobile Access



Remote Unlock
(Optional)

HOTEL DND SYSTEM



OZ-DND-01 STD BLACK ₹ 12,800



OZ-DND-02 STD BLACK ₹ 15,800

Model	OZ-DND-01 STD BLACK	OZ-DND-02 STD BLACK
Hotel DND System Function	• DND (Do not disturb) • Make up room • Door bell sign	• DND (Do not disturb) • Check-In • Make up room • Door bell sign • Room no. (Customize) • Hotel name (Customize) • Hotel logo (Customize)

Features:

- Allows guests to activate the “Do Not Disturb” mode from inside the room.
- DND status is indicated by icon on the panel outside the room.
- Prevents housekeeping and service staff from knocking or entering the room.
- Enhances guest privacy and comfort by avoiding unwanted interruptions.
- Seamlessly integrates with MUR (Make Up Room) and doorbell systems.